

## Product Details

# LIGHTWEIGHT SOLAR PANEL

## LE-M2-270W



Anti-Slip Surface




Junction Box



MC4

## Module Diagram

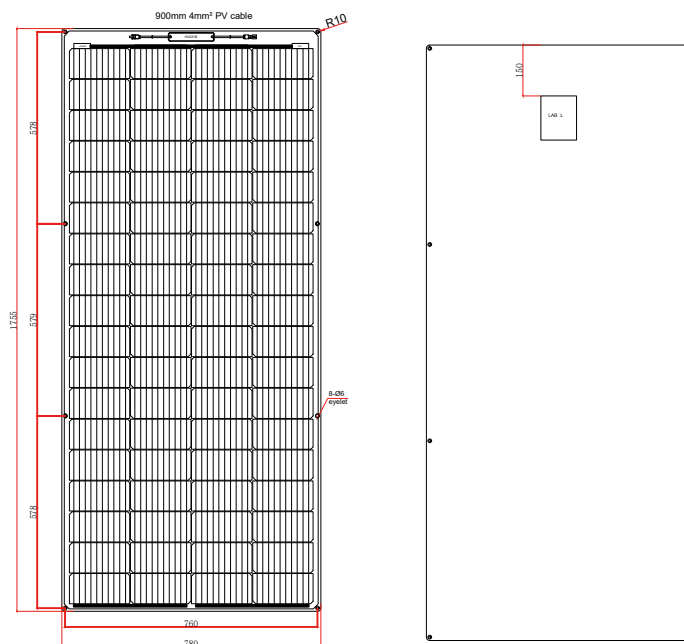

LE-M2-270W

## Electrical Characteristics

Maximum power(Pmax)	270W
Open-circuit voltage(Voc)	48.0V
Voltage at Pmax(Vmp)	41.0V
Short-circuit current(Isc)	6.91A
Current at Pmax(Imp)	6.59A
Cells Efficiency(%)	22.4%
The maximum system voltage	200V DC(IEC)
Power temperature coefficient	-0.38%/°C
Voltage temperature coefficient	-0.36%/°C
Current temperature coefficient	0.07%/°C
Output power tolerance	±3%
Operating Temperature	-20°C~75°C

## Specifications

Solar cell brand	A grade mono solar cells 182mm
No.of cells and connections	72(4*18)
Module dimension	1755*780*4mm
Waterproof	IP67
Certifications	CE, ROHS
Warranty	1 year and service life 10 years

## Product Introduction

Sungold LE-series of product is the semi-flexible solar panel. It uses ETFE material on its surface, and the biggest feature is ultra-light, which is 50% lighter than glass solar panels of the same wattage. The solar panel can be very easy to carry and provide electricity for RVs, sea boats, tents, etc. No bracket needed, energy-saving, and environmental protection.

